



WELLKU POWER PTY LTD

Add: 1/60 Machinery Street Darra. QLD 4076

Tel: +61-7-33751130

Email:wellkuchao@gmail.com

Website:www.wellku.com.au

Mini Loader LXHY380

Machine Load Capacity :400 Kg

Speed: 0-4 km/hr

Engine : B&S 3864 V-Twin ,

Max Power:18.2KW/3600RPM

Max Torque:45.5N.M/2800RPM

Engine Fuel: Petrol

Fuel Tank Volume :30 L

Starter: Key start

Battery:12v 36Ah Maintenance Free

Air Filter: B&S comes with it

Hydraulic Valve : HC Control Valve

Hydraulic Pump: G5 Pump 21.6 L/min, 18 MPa/3000rpm

Hydraulic Oil Tank : 30 L

Hydraulic Oil Cooler: Standard

Hydraulic Connections: Spanish brand Flat Faced G1/2, G3/8 Quick Connects (can choose Italian DNP brand, need +¥200)

Tracks :Heavy Duty Rubber Construction

Machine Weight: ~880 kg



WELLKU POWER PTY LTD

Add: 1/60 Machinery Street Darra. QLD 4076

Tel: +61-7-33751130

Email:wellkuchao @gmail.com


Website:www.wellku.com.au

Machine Dimensions:2285 mm (L) x 1090 mm(W) x 1270 mm (H) Max.

Dump Height : 1480 mm

Warranty 24 Months Parts Supply

The parameters are as follows

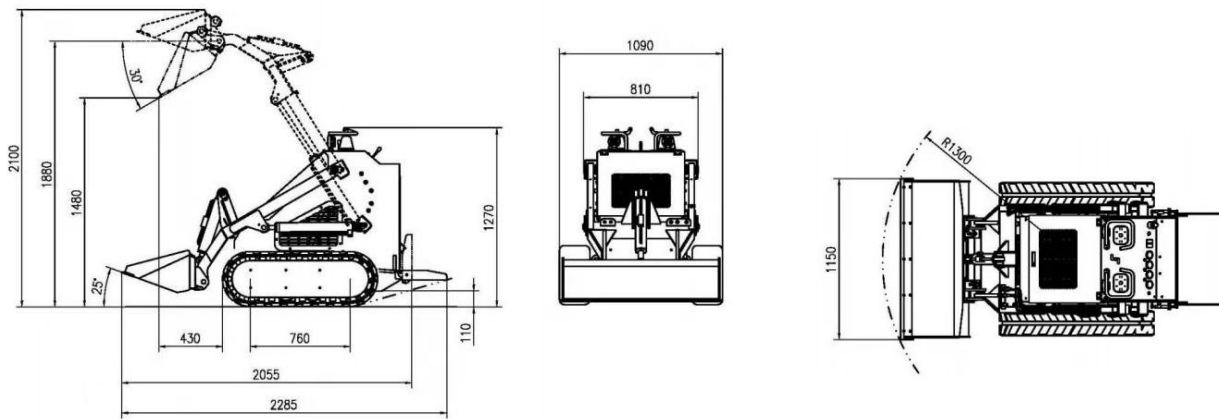

Item	LXHY380	
	With Rubber Track	
	Metric	U.S.
Max working height	2100 mm	82.7inch
Max pin height	1880 mm	74.01 inch
Max Dumping height	1480mm	58.26 inch
Max Dumping distance	430 mm	16.92 inch
Max Dumping Angle	30°	30°
Rollback of bucket on ground	25°	25°
Departure angle	27°	27°
Total height	1270mm	50 inch
Ground clearance	110 mm	4.33inch
Wheel base	760 mm	29.92inch
Overall length without bucket	1782mm	70.15 inch
Total width	810mm	31.88inch
Bucket width	1090 mm	42.91 inch
Total length with bucket	2285 mm	89.96 inch
Turn radius forward turning	1300 mm	51.18inch



WELLKU POWER PTY LTD

Add: 1/60 Machinery Street Darra. QLD 4076

Tel: +61-7-33751130

Email:wellkuchao@gmail.com

Website:www.wellku.com.au

overall length without the bucket after folding the pedal	1570 mm	61.81 inch
Engine		
Rated Power (KW)	18.2KW(23HP)	
Rotating speed (rpm)	3600	
Noise (Db)	≤95	
Hydraulic System		
Pressure (Mpa)	17	
Working Time (s)		
Raise	4	
Dump	1.3	
Lower	3.2	
Operating Load	280 Kg	617 Lb
Bucket Capacity	0.13 m ³	4.59 ft ³
Max Lifting Force	458Kg	1009Lb
Travel Speed	0-5.5Km/h	3.5 mlie/h
Operating Weight	880 Kg	1940 Lb